

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
11 October 2001 (11.10.2001)

PCT

(10) International Publication Number
WO 01/75208 A1

(51) International Patent Classification⁷: D06C 11/00

(21) International Application Number: PCT/US01/07562

(22) International Filing Date: 9 March 2001 (09.03.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
09/542,205 4 April 2000 (04.04.2000) US

(71) Applicant: MILLIKEN & COMPANY [US/US]; 920
Milliken Road, Spartanburg, SC 29303 (US).

(72) Inventors: DEMOTT, Roy, P.; 307 Holly Drive, Spartan-
burg, SC 29301 (US). DISCHLER, Louis; 252 West Park
Drive, Spartanburg, SC 29306 (US).

(74) Agent: BACON, Jeffery, E.; Milliken & Company, P.O.
Box 1926 (M-495), Spartanburg, SC 29304 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM,
HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK,
LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX,
MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL,
TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian
patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European
patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE,
IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF,
CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments

*For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.*

(54) Title: PILE FABRIC HAVING CONDITIONED PILE ENDS

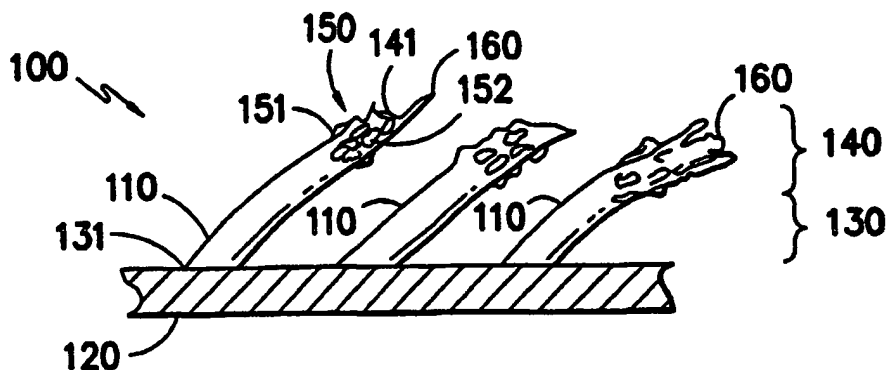

(57) Abstract: A pile (110) of a pile fabric (100) is subjected to a forward abrasive action and a reverse abrasive action. The pile (110) of the pile fabric (100) obtains disturbances (150) and/or fibrils (160) on the ends of the piles (110).

WO 01/75208 A1

PILE FABRIC HAVING CONDITIONED PILE ENDS

BACKGROUND

5 The present invention is directed to fabrics, and in particular, to pile fabrics having treated pile.

 In one method of producing pile fabrics, a double-knitted pile fabric is produced by knitting two separate fabrics face to face with float yarns interlaced between the two. A knife moves between the two fabrics severing
10 the floats, which become cut pile of the pile fabrics. However, the ends of the pile for fabrics produced in this matter are typically disrupted to have an expanded cross-section. In some instances the expanded cross-section appears in a profile view as an anvil. In many instances, the anvil can angle back towards the direction of the pile fiber, producing a hook-like structure.
15 Alternatively, a flat fabric may be napped and sheared, producing expanded fiber ends very similar to those of the slit knit pile. In either case, the pile has a substantially uniform length

 Materials such as fabrics are characterized by a wide variety of functional and aesthetic characteristics. Of those characteristics, a particularly
20 important feature is fabric surface feel or "hand". The significance of a favorable hand in a fabric is described and explained in U.S. Patents 4,918,795 and 4,837,902, both issued to Dischler, and both being incorporated in there entirety herein by specific reference thereto.

 The expanded end of piles in the traditional pile fabrics provides a hand
25 or surface feel that might have a "sticky" feel. Additionally, if "hooks" are created by the anvil on the end of the piles, the "hooks" can become entangled with materials that pass over the pile fabric, such as furs, or the like. Furthermore, the expanded pile ends, and anvils, of prior art pile can produce an appearance of a different color or hue when the pile is brushed in different
30 directions. Therefore, there is a need for pile fabrics having ends of the pile which reduce these effects of common pile fabric to provide a better "hand" or feel of the fabric.

BRIEF DESCRIPTION OF THE DRAWINGS

The present invention can be described with regard to the accompanying drawings where:

- 5 FIG. 1 is an illustration of a prior art pile fabric;
 FIG. 2 is an illustration of an embodiment of the pile fabric of the present invention having end zones with disturbances and fibrils extending from the ends of the pile fiber;
 FIG. 3 is an illustration of an embodiment of the pile fabric of the present invention having end zones with disturbances and fibrils extending from the side walls and ends of the pile fiber;
10 FIG. 4 shows a block diagram of a process according to the present invention for the treatment of pile;
 FIG. 5 is an enlargement of the pile of a prior art fabric prior to treatment according to the process in FIG. 4;
15 FIG. 6 is an enlargement of the prior art fabric from FIG. 5 after processed according to the process in FIG. 5;
 FIG. 7 is an enlargement of the pile of a prior art fabric prior to treatment according to the process in FIG. 4;
20 FIG. 8 is an enlargement of the prior art fabric from FIG. 7 after processed according to the process in FIG. 7;
 FIG. 9 is an enlargement of the pile of a prior art fabric prior to treatment according to the process in FIG. 4;
 FIG. 10 is an enlargement of the prior art fabric from FIG. 9 after
25 processed according to the process in FIG. 9.

DETAILED DESCRIPTION

- Referring now to the figures, and in particular to FIG. 1, there is illustrated a prior art pile fabric 10 with pile fibers 11, which has been produced
30 by the traditional prior art method of severing the float yarn interlaced between two fabrics with a knife. The pile fibers 11 of the fabric 10 extend from a substrate 12. As illustrated in FIG. 1, the process of severing float yarns with a

knife produces pile fibers 11 having a base section 13 and end zones 14. The end zones 14 include one-sided disturbances 15 and/or enlarged ends 16, typically being an anvil shape.

Referring now to FIG. 2, there is illustrated a fabric 100 of one
5 embodiment of the present invention having a face side with pile fibers 110. The pile fibers 110 of the fabric 100 extend from a substrate 120. In one embodiment, the pile fibers 110 are polyester. However, it is contemplated that the pile fibers 110 can be formed of any thermoplastic polymer. The pile
10 fibers 110 are free end fibers that include a base section 130 and an end section 140. The base section 130 has a proximal end 131 disposed approximate to the substrate 120, and the end section 140 has a distal end 141 disposed opposite from the proximal end 131. The end section 140 includes disturbances 150 of flaking 151 and/or pitting 152 around a majority of
15 the pile 110. However, it is preferred that the disturbances 150 of flaking 151 and/or pitting 152 be substantially around the circumference of the pile fiber 110, and even more preferred that the disturbances 150 be entirely around the circumference of the pile fiber 110. The disturbances 150 of the end section 140 extend down the pile fiber 110 a distance of at least about 2%, and no more than about 90%. In one embodiment, it is preferred that the disturbances
20 150 extend down the pile fiber at least about 5% and no more than about 50%. The end 141 of the pile fiber 110 has had a majority of the enlarged head removed, and fibrils 160 extend from the end 141 of the pile fiber 110.

Referring now to FIG. 3, there is illustrated a fabric 200 of one
embodiment of the present invention having a face side with pile fibers 210.
25 The pile fibers 210 of the fabric 200 extend from a substrate 220. In one embodiment, the pile fibers 210 are polyester. However, it is contemplated that the pile fibers 210 can be formed of any thermoplastic polymer. The pile fibers 210 are free end fibers that include a base section 230 and an end
section 240. The base section 230 has a proximal end 231 disposed
30 approximate to the substrate 220, and the end section 240 has a distal end 241 disposed opposite from the proximal end 231. The end section 240 includes disturbances 250 of flaking 251 and/or pitting 252 around outer

circumference of the pile 210. As with the pile fiber 110 from FIG. 2, the disturbances 250 of flaking 251 and/or pitting 252 are around a majority of the pile fiber 210. However, it is preferred that the disturbances 250 be substantially around the circumference of the pile fiber 210, and even more preferred that the disturbances 250 be entirely around the circumference of the pile fiber 210. The disturbances 250 of the end section 240 extend down the pile fiber 210 a distance of at least about 2%, and no more than about 90%. In one embodiment, it is preferred that the disturbances 250 extend down the pile 210 fiber at least about 5%, and no more than about 50%. The end 241 of the pile fiber 210 has had the enlarged head removed, and fibrils 260 extend from the end 241 of the pile fiber 210 and from the side walls of the pile fiber 210 in the end section 240.

Referring now to FIG. 4, there is shown a block diagram illustrating a process of the present invention for treating the pile of a pile fabric 310. The pile fabric 310 is subjected to the process of the present invention wherein the face side, or pile side, 311 of the fabric 310 is exposed to a high-pressure contact with a plurality of abrasive covered rollers 320 and 330. The contact pressure of the fabric 310 against the abrasive rollers 320, 330, is generated by controlling the tension of the fabric 310 over the abrasive rollers 320, 330, which is preferably greater than 2 pounds per linear inch. The diameter of the abrasive rollers 320, 330, is preferably 4.5 inches, and may range from 2 inches to 24 inches. The abrasive material covering the surface 321 and 331, respectively, of the abrasive rollers 320 and 330, is preferably a U.S. mesh size of 220 grit, or smaller, and most preferably of 400 grit. The grit should have a mohs' hardness of about 9 to about 10, with diamond grit being the most preferred. It is believed that angular sueding, as disclosed in U.S. Patent 5,943,745, issued to Dischler et al., which is hereby incorporated in its entirety herein by specific reference to, may also be advantageously used by the process. However, any abrasion angle may be used.

Still referring to FIG. 4, the pile fabric 310 travels from a supply roll 312, over the abrasive rollers 320, 330, and to a take up roll 314. At least one of the abrasive rollers 320, 330, is rotated at a speed that results in the abrasive

surface 321, 331, traveling at a speed greater than the pile fabric 310. The result of this greater speed is a forward abrasive action on the pile of the fabric 310. At least one of the abrasive rollers 320, 330, is rotated at a speed and direction that results in the abrasive surface 321, 331, of the coated roller 320, 330, traveling in a relative direction opposite to the flow of the pile fabric 310. The result of this relative opposite direction of the abrasive surface is a reverse abrasive action on the pile of the fabric 310. The forward and reverse abrasive action on the pile of the fabric 310 causes at least a majority of the circumference around the pile fibers to have disturbances and/or fibrils.

After the piles of the fabric are subjected to the abrasive action, the fabric can be dyed and finished. In one embodiment, the finish includes a coating of a chemical lubricant to improve the "handle" of the fabric. A preferred chemical lubricant includes a condensate of dimethyl terphthalate and high molecular weight polyethylene glycol. An example of a chemical lubricant that can be used in the present invention is Lubril QCX, from Abco Chemical, Roebuck, S.C. The chemical lubricant is applied in an aqueous solution with 16% solids. The aqueous solution is applied at a rate of from about 0.5% to about 5.0% of the weight of the fabric, and preferably about 1.5% of the weight of the fabric. The chemical lubricant retains moisture and acts as an antistat to aid in processing and post processing comfort. The chemical lubricant allows a hand to glide more easily across the pile of the fabric and give an additional softness to the touch of the fabric. One unexpected result of the present invention is the enhanced effect of the chemical lubricant finish when used on the pile fabric of the present invention. It is believed that the fibrils and disturbances of the present invention provide additional surface area for storage and contact of the chemical lubricant finish.

Referring now to FIG. 5, there is illustrated the pile 50 of a prior art fabric prior to treatment according to the process of the present invention. As shown in FIG. 5, the process of cutting the prior art pile creates heads 51 on the ends of many of the piles 50. The heads 51 are typically anvil shaped, many of which angle back sufficiently enough to form "hooks". The process of cutting the prior art pile 50 also creates disturbances 52 on a single side of the

end zone 53 of the pile 50. It is believed that the disturbances 52 are created only on one side of the pile due to contact of the cutting blade just prior to cutting the pile 50.

Referring now to FIG. 6, there is illustrated pile of the fabric from FIG. 5, which has been subjected to the process of the present invention. The piles 410 of the treated pile fabric have free end fibers with end zones 440. The end zones 440 include disturbances 450 around a majority of the circumference of the pile 410. In most areas of the end zone 440 of the pile 410, the disturbances 450 are either substantially around the circumference of the pile 410, or entirely around the circumference. The disturbances 450 of the pile ends 440 include flaking 451 and pitting 452 of the pile surface. The disturbed zones of the piles 410 also include fibrils 460 extending from the pile 410. Although some fibrils 460 are located on the side walls of the piles 410, a majority of the fibrils 460 are located extending from the ends 441 of the piles 410. It is believed that a majority of the fibrils 460 are located on the ends 441 of the pile 410 because the enlarged heads of the prior art pile fabric are transformed more readily into the fibrils 460 by the process of the present invention.

Referring now to FIGS. 7 and 8, there is illustrated the pile of a fabric before and after, respectively, being subjected to the process of the present invention. The piles of the fabric in FIGS. 7 and 8 illustrate a greater amount of disturbances on the pile ends of the fabric. As shown in FIG. 8, the pile fibers 510 have a greater proportion of disturbances 550 of flaking 551 and pitting 552 of the pile end zones 540 than the pile 410 in FIG. 6. Additionally, the pile end zones 540 of the pile 510 in FIG. 8 have a greater amount of fibrils 560 extending from the side walls of the pile 510 than the pile end zones 440 of the piles 410 in FIG. 6.

Referring now FIGS. 9 and 10, respectively, there is illustrated the pile of a fabric before and after, respectively, being subjected to the process of the present invention, the cross section of the pile having a non-circular shape. A cross section of the pile in FIGS. 9 and 10 has three lobes extending from a central area. As illustrated in FIG. 10, the pile 610, after processing, has

disturbances 650 around the cross section in the area of the end zone 640 of the pile 610, similar to the disturbances 450 and 550 in the piles of FIGS. 6 and 8. Fibrils 660 also extend outwardly from the end zones 640 of the piles 610, similar to the fibrils 460 and 560 on the piles 410 and 510 of FIGS. 6 and 8.


It is believed that the disturbances and fibrils on the ends of the pile in the present invention help reduce the "sticky" feel associated with the prior art pile fabrics. Additionally, the present invention reduces the entanglement associated with "hooks" created by the expanded ends of the prior art piles.

Although the present invention has been described in considerable detail with reference to certain preferred embodiments, other versions are possible. Therefore, the spirit and scope of the appended claims should not be limited to the detailed descriptions of the preferred embodiments contained herein.



WHAT IS CLAIMED IS:

1. A fabric having a face side comprising pile fibers having a free length between a proximal end and a distal end, at least a portion of said pile
5 fibers having surface abrasions extending from said distal end towards said proximal end, wherein said surface abrasion are disposed from about 2% to about 90% of said free length of said pile fibers.
2. A fabric having a face side comprising pile fibers having a free
10 length between a proximal end and a distal end, at least a portion of said pile fibers having surface abrasions extending from said distal end towards said proximal end, wherein said surface abrasions are disposed from about 5% to about 50% of said free length of said pile fibers.
- 15 3. A fabric having a plurality of free end pile fibers with a base section and an end section, the end section having disturbances around a majority of the circumference of the free end pile fiber.
- 20 4. A fabric having a plurality of free end pile fibers with a side wall and an end, further comprising the at least one fibril extending from said side wall and at least one fibril extending from said end.
- 25 5. The fabric according claim 4, further including a chemical lubricant disposed on the pile fibers.
6. A method of treating the pile of a pile fabric, the method comprising the steps of:
applying a forward abrasive action on the pile of the fabric; and
applying a reverse abrasive action on the pile of the fabric.

1/5

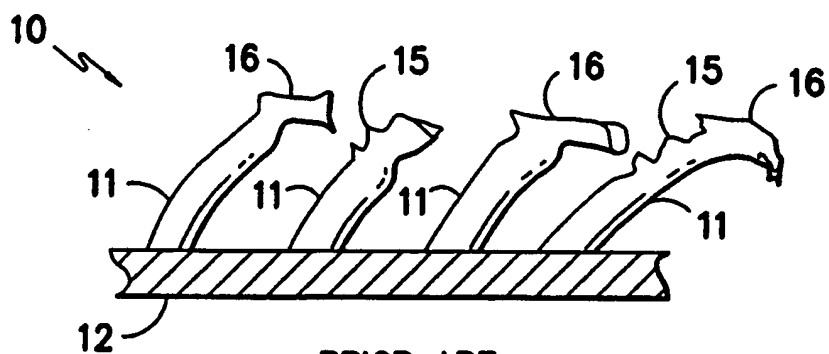

PRIOR ART

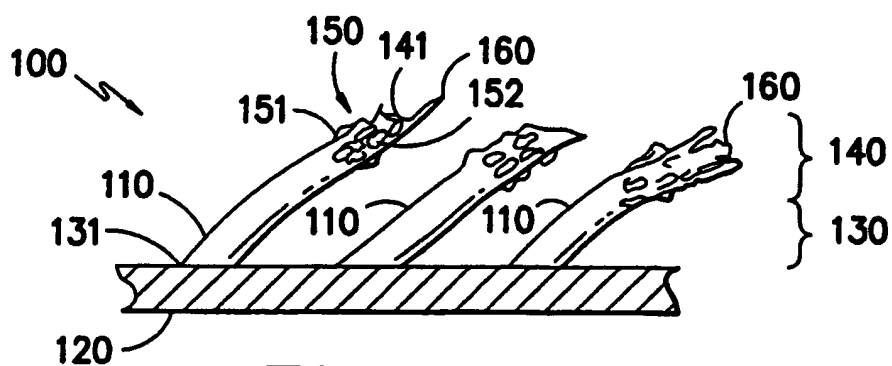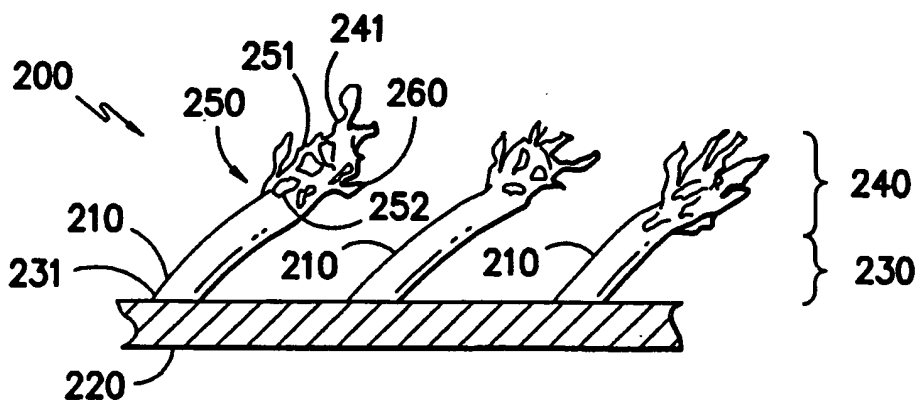FIG. -1-**FIG. -2-****FIG. -3-**

2/5

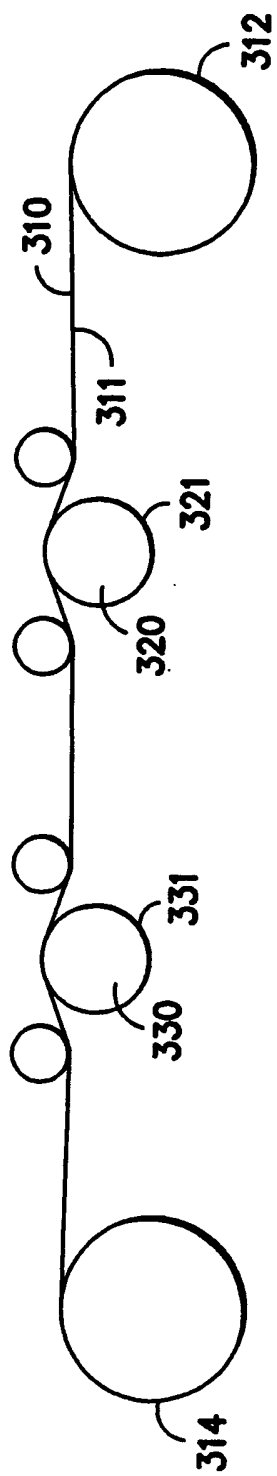


FIG. -4-

3/5

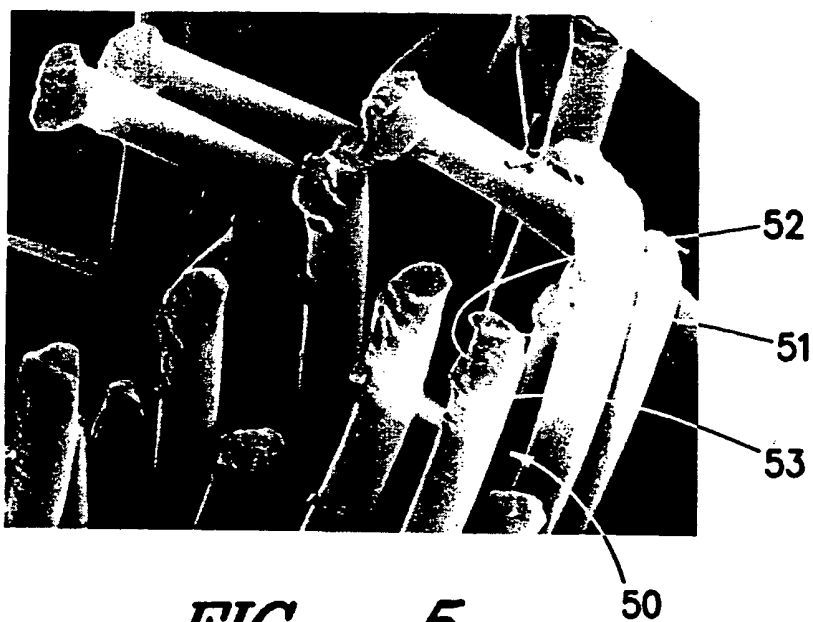


FIG. -6-

4/5



FIG. -7-

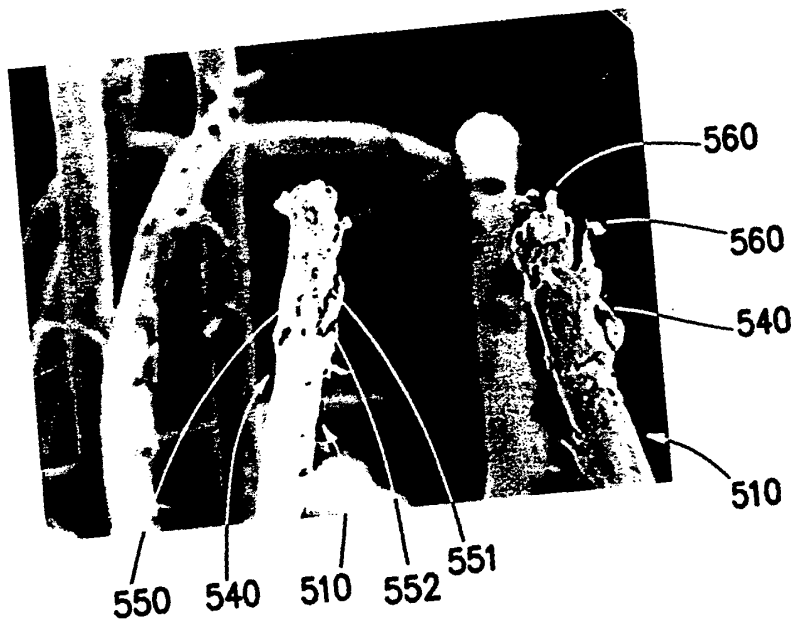


FIG. -8-

5/5



FIG. -9-

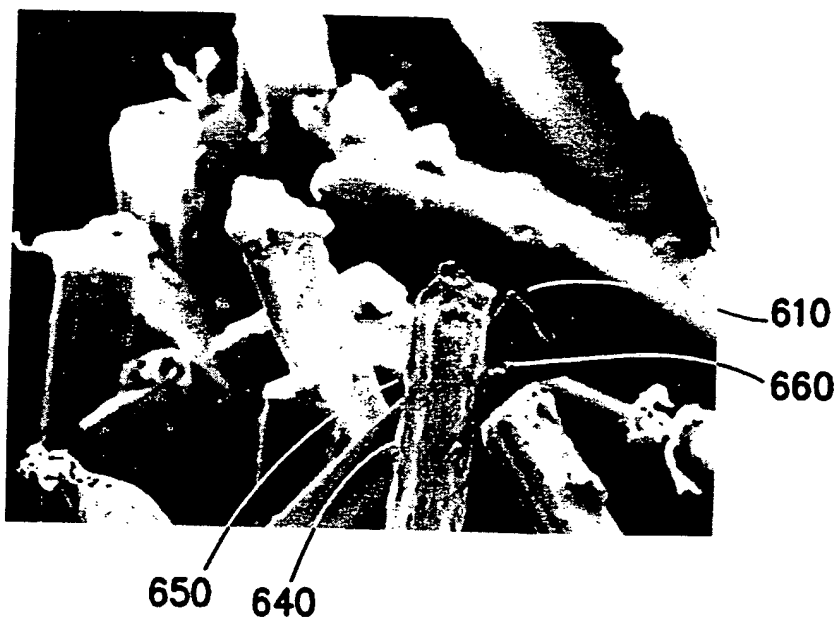


FIG. -10-

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 01/07562

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 D06C11/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 D06C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, PAJ, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0 381 864 A (GEBRÜDER SUCKER + FRANZ MÜLLER GMBH & CO) 16 August 1990 (1990-08-16) claim 1; figure 1	1-4, 6
A	US 4 259 393 A (F.W. MARCO) 31 March 1981 (1981-03-31) claim 1; figures 1-8	1-4
A	WO 97 14841 A (NORTH BEL INTERNATIONAL S.R.L.) 24 April 1997 (1997-04-24) claims 1,12; figure 2	6

☐ Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

& document member of the same patent family

Date of the actual completion of the international search

31 July 2001

Date of mailing of the international search report

14/08/2001

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Goodall, C

INTERNATIONAL SEARCH REPORT

International Application No
PCT/US 01/07562

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0381864 A	16-08-1990	DE 3904003 A	16-08-1990
		DE 58901894 D	27-08-1992
		ES 2034572 T	01-04-1993
		US 5050280 A	24-09-1991
US 4259393 A	31-03-1981	US 4291442 A	29-09-1981
WO 9714841 A	24-04-1997	IT MI952182 A	21-04-1997
		AT 192793 T	15-05-2000
		AU 4354296 A	07-05-1997
		CA 2233456 A	24-04-1997
		DE 69516911 D	15-06-2000
		DE 69516911 T	18-01-2001
		EP 0856077 A	05-08-1998
		ES 2148590 T	16-10-2000
		US 6122807 A	26-09-2000